



GRENENTEC

Induction Lighting

www.GRENENTEC.com



GRENENTEC Induction Lighting EHBAC-200W

Wattage: 200w

Lamp Life Rating: 100,000 hours

Ballast Life Rating: 60,000 hours

CCT: 5000k

CRI: 82-85

IP Rating: IP43

Vibration & Shock Resistance: Excellent

Applications: Warehouses, factories, showrooms, gymnasiums

Specifications

Lamp

Wattage (W)	Lumens (LM)	CRI	CCT (Kelvin)	Rated Life (Hours)
200	18,250	82-85	5000	100,000

Ballast

Input Power (W)	Input Voltage (V)	Input Current (A)	Input Freq. (Hz)	Power Factor (PF)	Operating Temp. (°F)	THD (%)
215	120-277/480	1.77-0.80	50/60	>.95	-20 to 120	<10

Physical Specifications

Aluminum reflector with anodized inner surface

UV stabilized acrylic or tempered glass lens

Die cast aluminum ballast casing with corrosion-resistant white powder coat finish

Simple latching hook or pendant mounting system

Electronic ballast with high power factor




GRENENTEC

Induction Lighting

www.GRENENTEC.com

GRENENTEC Induction Lighting EHBAC-200W

Dimensions

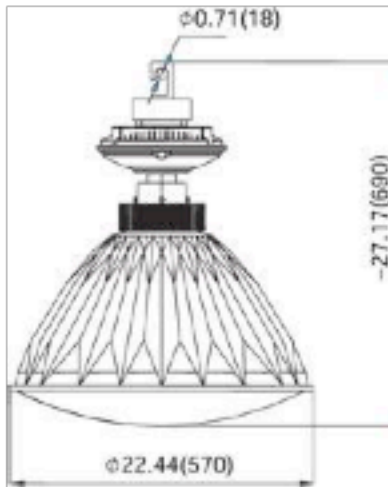

Photometric Data

